

Images shown are not to scale.


<sup>\*</sup> Drilling for concealed hinges is available on doors with these profiles.

<sup>\*\*</sup> Designed for use on a "finished end panel." Can be used with Conestoga Cabinet Systems.




Not all framing beads and panel raises are available with all door designs. Design charges include choice of framing bead and panel raise.

## Framing Beads



## Panel Raises (Dimensions shown below for 3/4" doors only)

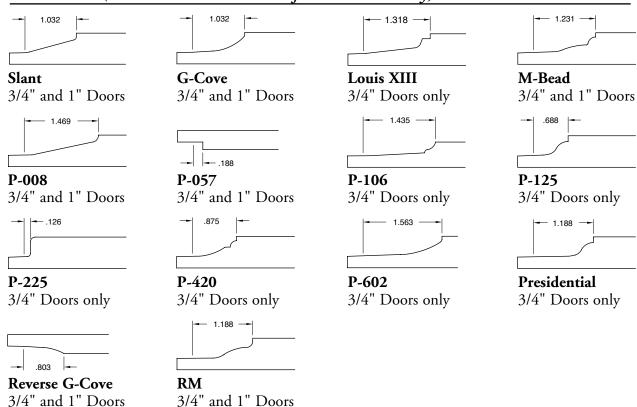

All published raises are available in hybrid products. Hybrid products consist of MDF panel and solid wood framing. 3/4" thick doors measure 5/8" finished panel thickness except reverse G-cove and P-057 which measure 3/8" thick. MDF panels with reverse G-cove and P-057 measure 3/8" thick.

1" thick doors measure 3/4" finished panel thickness except reverse G-cove and P-057 which measures 1/2" thick. Images shown are not to scale.

## End Grain Sealant Option

- Sealer is applied to the end grain of the panel raise and framing which results in a more uniform appearance between end grain and face grain after the finish is applied. While the end grain sealant option will greatly improve end grain appearance, end grain will still appear somewhat darker than non-end grain areas.
- Available on all published species, finished or unfinished.
- Available on all published panel raises and edge profiles.
- Plywood panel miters, inset drawer fronts, Astoria and Savoy designs are not eligible for end grain sealant option.
- Add 2 days to lead-time; expedites not available.