

1/8", 1/4" and 3/4" Plywood Program (continued)

Pricing Instructions

- Multiply actual square footage of panel by the appropriate specie material charge.

Options

- Cut-to-size.
 - ◆ When ordering cut-to-size plywood, specify width, height and grain direction.
- Edgeband charges (3/4" plywood only):
 - ◆ .5mm edgeband 1 to 4 edges.
 - ◆ 3mm edgeband 1 to 4 edges.
 - ◆ For edgeband on specific edges of cut-to-size plywood, specify edges as follows: top, bottom, left, right or all edges.
- Grooving available (1/4" material only).
 - ◆ G-012, G-015 or G-056 groove profiles.
 - ◆ Spacing available in increments starting at 1/2" up to 4".
- Cut-to-size or full sheets of plywood also available finished; see Finishing Program section for finish options and pricing.
- Colourtone finishes are available on Cherry, Hard Maple, White Birch and Red Oak plywood only.

1/8" Plywood Panel Program		
Specie		
Cherry		
Maple, Hard		

1/4" Plywood Panel Program		
Specie		
Alder		
Birch, Red		
Birch, White		
Bamboo, Caramelized		
Cherry		
Maple, Hard		
MDF (Raw)		
Hickory		
Knotty Pine		
Quarter Sawn Red Oak		
Quarter Sawn White Oak		
Red Oak		
White Oak		
Walnut		

3/4" Plywood Panel Program		
Specie (Face/Back)		
Alder/Natural Birch		
Bamboo, Caramelized/Bamboo (MDF core)		
Cherry/Cherry		
Cherry/Natural Birch		
Maple, Hard/Maple, Hard		
Maple, Hard/Natural Birch		
Red Oak/Red Oak*		
Red Oak/Natural Birch*		
Rift Cut White Oak/Rift Cut White Oak (MDF core)		
Walnut/Walnut (MDF core)		
Wenge/Wenge* (MDF core)		
Zebrawood/Zebrawood* (MDF core)		

*Available with .5mm edgebanding only.

1/4" Short Grain Plywood Program

- 96" x 48" panel for island back or wall panel applications.
- Grain runs vertically in the 48" direction.
- 1/4" thick material with Grade A face veneers applied over MDF core with sound back.
- Available unfinished or finished; see Finishing Program section for finish options and pricing.
- Lead-time 3 days unfinished, add 5-6 days for finishing.

1/4" x 96" x 48" Plywood Short Grain Panel		
Part #	Specie	
1600121A	Cherry	
1600122A	Maple, Hard	

1/4" Solid Refacer's Program

- Moulding 2073 is solid 1/4" thick and designed to be applied over the face frames of existing cabinetry in field refacing applications.
- Available in 1/16" width increments from 1" to 6" wide x 96" long.
- Variable width refacer's moulding is available in Choice grade material. Sizes shown in the table below are for 1/4" thick "surfaced four sides" (S4S) square stock, moulded and sanded.
- Available finished or unfinished. If finish option is chosen, moulding will be finished on face and two long edges only.





Ordering and Sizing Specifications

- Moulding is categorized and priced by width. Moulding width refers to the smallest whole-inch dimension of the refacing segment required. If the moulding is 1-1/4" wide, the appropriate pricing will be located in the 2" column. This rule is applicable to all sizes.
- Moulding wider than 5-1/16" may have one glue joint running the entire length.

1/4" Thick Solid Refacing Moulding Pricing						
8' Choice Grade 10 day lead-time						
Specie	Moulding Width					
	1"	2"	3"	4"	5"	6"
Alder						
Bamboo						
Birch, Red						
Birch, White						
Cherry						
Hickory						
Maple, Hard						
Maple, Soft						
Oak, Red						
Oak, White						
PG Hard Maple						
Pine						
Walnut						

Veneers

- All veneers are approximately 1/32" thick and have real wood faces.
- One end and one side of any veneer sheet is guaranteed to be free from physical damage.
- Wood back veneers have a cross grain wood backer which allows trim edges to be finished to reduce "black line" effect.
- Poly back veneers are applied to a polymer resin impregnated membrane. They contain no added urea formaldehyde (NAUF), are rigid yet pliable and provide excellent moisture resistance.
- Wood back and poly back veneers are available with their applicable backer or a pressure sensitive adhesive (PSA). PSA veneers have a pre-glued adhesive layer protected by a peel coat covering that must be removed prior to application.
- Veneers are not guaranteed to perfectly match solid wood doors. Veneer is sliced from premium material; color and grain match will be more uniform than solid wood doors. Hickory veneers may contain mineral streaks and peck marks.
- Proper surface conditions and preparation is essential to successful application and performance of veneered surfaces.
- Per manufacturer's recommendations, veneers of all backer types should be placed flat and allowed to acclimate 48 hours before installation.
- Pressure sensitive veneers should not be applied to bare wood or surfaces covered with sanding sealers, high pressure laminates, melamine or other plastic materials.
- Wood back and poly back veneers are best applied with roller grade adhesives. Sufficient adhesive coverage on both the veneer and substrate surface will ensure proper adhesion and performance.
- Conestoga is not liable for product failure due to improper surface preparation, adhesive selection or installation technique.
- Finishing option available. Stained veneers may vary slightly in color from solid wood products of the same specie. Finishing adds 5-6 days to standard lead-time.
- Conestoga does not accept returns on veneers.



Specie	24" x 96"		48-1/2" x 96-1/2"	
	PSA Wood Back	PSA Poly Back	Wood* Back	Poly Back
Alder				
Anigre	N/A	N/A		
Bamboo				
Birch, Red				
Birch, White				
Cherry				
Hickory				
Macassar Ebony	N/A	N/A		
Maple, Hard				
Oak, Red				
Oak, White				
Pine, Knotty				
Quarter Sawn White Oak				
Walnut				
Wenge	N/A	N/A		
Zebrawood	N/A	N/A		

Stock item 3 day lead-time. Custom item 10 day lead-time.


*Available with Colourtone finishes.

+When ordered with Colourtone, primer or Prism Paint finishes, phenolic back veneer will be substituted.

Wood Edgeband Program

Conestoga offers 7/8" wide x 250' or 500' rolls of .5mm wood edgeband to complete your panel processing requirements. See pricing charts below for specie availability.

- Real wood veneer applied to an unglued fleece backer.
- Edgeband is not guaranteed to perfectly match solid wood doors or sheet stock. Veneer edgeband is sliced from premium material; color and grain match will be more uniform than solid wood doors.
- Edgeband will contain multiple splice joints which will not be considered a defect.
- Conestoga is not liable for product failure due to improper surface preparation, adhesive selection or installation technique.
- All Conestoga finishing options are available as outlined in the Finishing Program section of this manual.
- Lead-time 5 days unfinished, add 5-6 days for finishing. Expedite lead-times not available.
- Conestoga does not accept returns of finished edgeband.

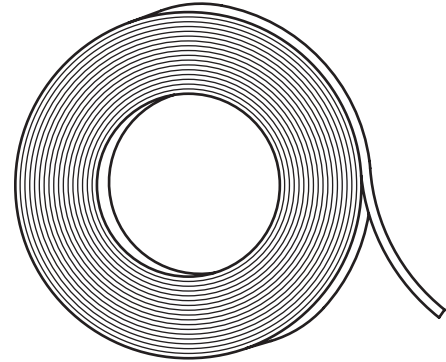

500' Wood Edgeband			
Specie		Specie	Price
Alder		Pine	
Anigre		Red Oak	
Bamboo		Walnut	
Cherry		Wenge	
Hard Maple		White Birch	
Hickory		White Oak	
Macassar Ebony		Zebrawood	

250' Wood Edgeband	
Specie	
Cherry	
Hard Maple	

Price per roll, unfinished; see the Finishing Program section for finish pricing.

- Stock item 5 day lead-time.
 Non-stock item 15 day lead-time.